

HEATING APPLIANCE VENTING SPECIALISTS

INSTALLATION INSTRUCTIONS

Flexi-Sleeve


Insulation and Protection Sleeve
 for Flexi-Liner Chimney Liners
 Gas Applications Only



MANUFACTURER:
 Selkirk Canada Corporation
 CDA Brockville, Ontario

FLEXI-SLEEVE:

Part#	Description
N10-(dia.)	Flexi-Sleeve (10' Insulation)

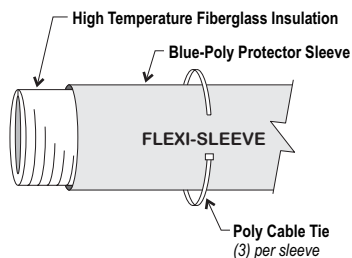

INSTALLATION ACCESSORIES:

Part#	Description
LLC-(dia.)	Flexi-Leader Cone

APPLICATION

Flexi-Sleeve is the only UL Listed insulation for use with Flexi-Liner liner system.

Laboratory testing has shown a flexible liner combined with an insulation sleeve exhibits the same heat retention performance as Type B Vent.

If there is any doubt about the cleanliness of the chimney after sweeping, Flexi-Sleeve insulation should be used to help protect the liner from contamination.

Use Flexi-Sleeve to minimize condensation and down drafting, particularly if:

- a) the flue gas temperature is below 280F at the entry point into the liner.
- b) Flexi-Liner is to be installed in an exterior or oversized chimney.
- c) the liner system is venting only fan-assisted appliances.
- d) the masonry chimney contains solid or liquid fuel residue from prior heating appliances.
- e) the appliance is equipped with a vent damper.

INSTALLATION PROCEDURE

