


# MODEL 1600

## ADJUSTABLE ROUND DIFFUSER

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

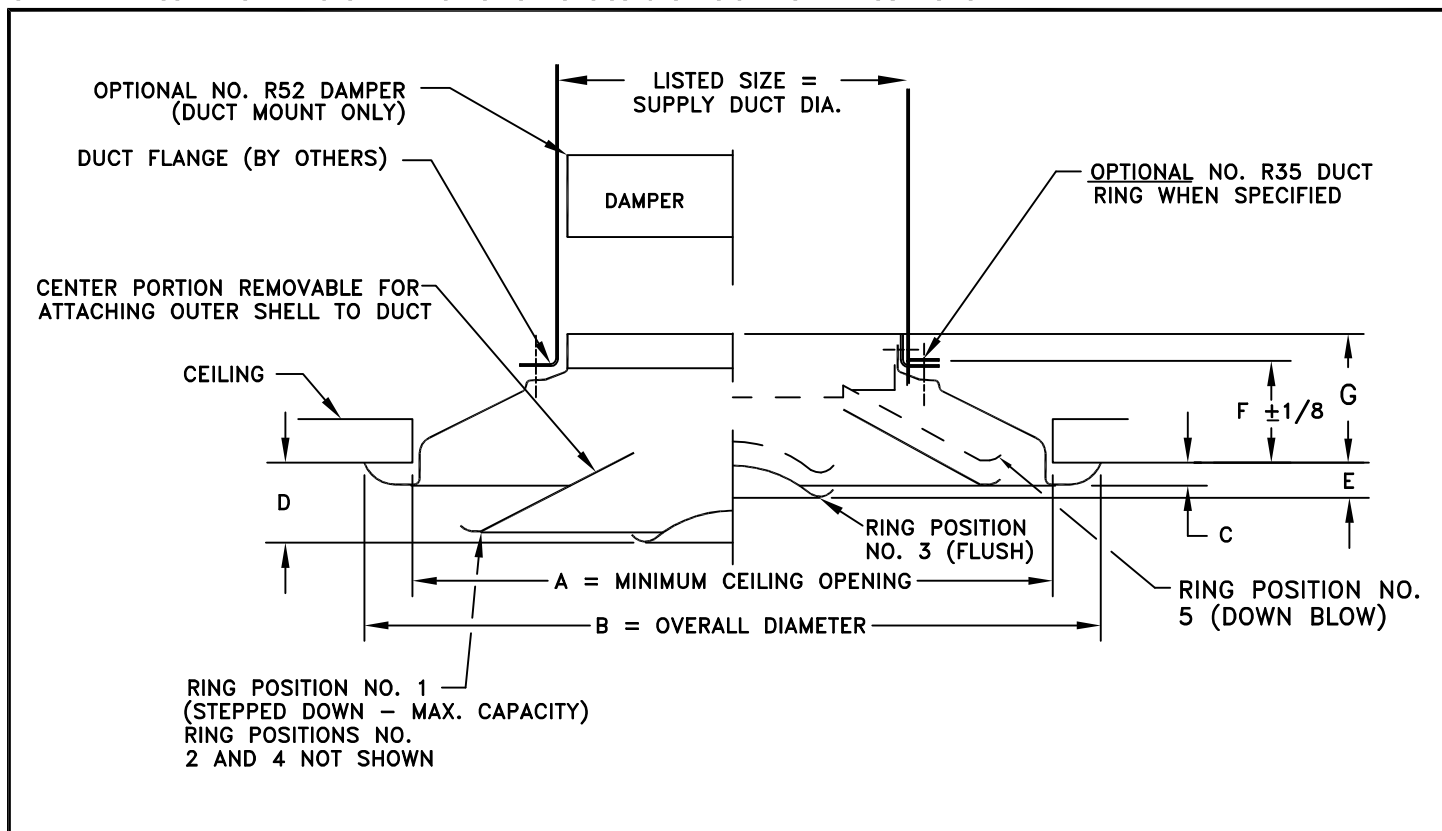

LISTED SIZE	CEILING OPENING A	OVERALL DIAMETER B	MARGIN HEIGHT C	MAXIMUM DEPTH D	MINIMUM DEPTH E	MOUNTING HEIGHT F	DIFFUSER HEIGHT G
6	11	12-5/8	3/8	1-3/8	3/4	1-3/4	2-15/16
8	14-3/4	17	1/2	1-13/16	15/16	2-5/16	3-11/16
10	18-3/8	21	5/8	2-3/16	1-1/16	2-15/16	4-11/16
12	21-15/16	25-1/4	5/8	2-9/16	1-1/4	3-1/2	5-7/16
14	25-1/2	28-1/2	11/16	2-7/8	1-5/16	4-1/4	6-5/16
16	29-1/8	33-7/8	7/8	3-3/8	1-9/16	4-3/4	7-1/4
18	32-3/4	37-1/2	1-1/16	4-3/16	1-13/16	5-3/8	8-13/16

Model 1600 is a 3 cone-ceiling diffuser which provides 360° maximum air diffusion efficiency. It adjusts to five air patterns. Model 1600 has a sliding core, which allows air pattern to be adjusted full horizontal flow to full vertical flow. Cone specially designed for reducing ceiling smudging. 1600 available in steel only. Optional round dampers and duct rings available. Standard white finish.

PROJECT: \_\_\_\_\_  
 ARCHITECT: \_\_\_\_\_  
 ENGINEER: \_\_\_\_\_  
 CONTRACTOR: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_



**J&J REGISTER**  
AIR DISTRIBUTION PRODUCTS