



# MODEL 4235/AL4235 R6

## PERFORATED SUPPLY DIFFUSER WITH FIBERGLASS PLENUM FOR T-BAR CEILING

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

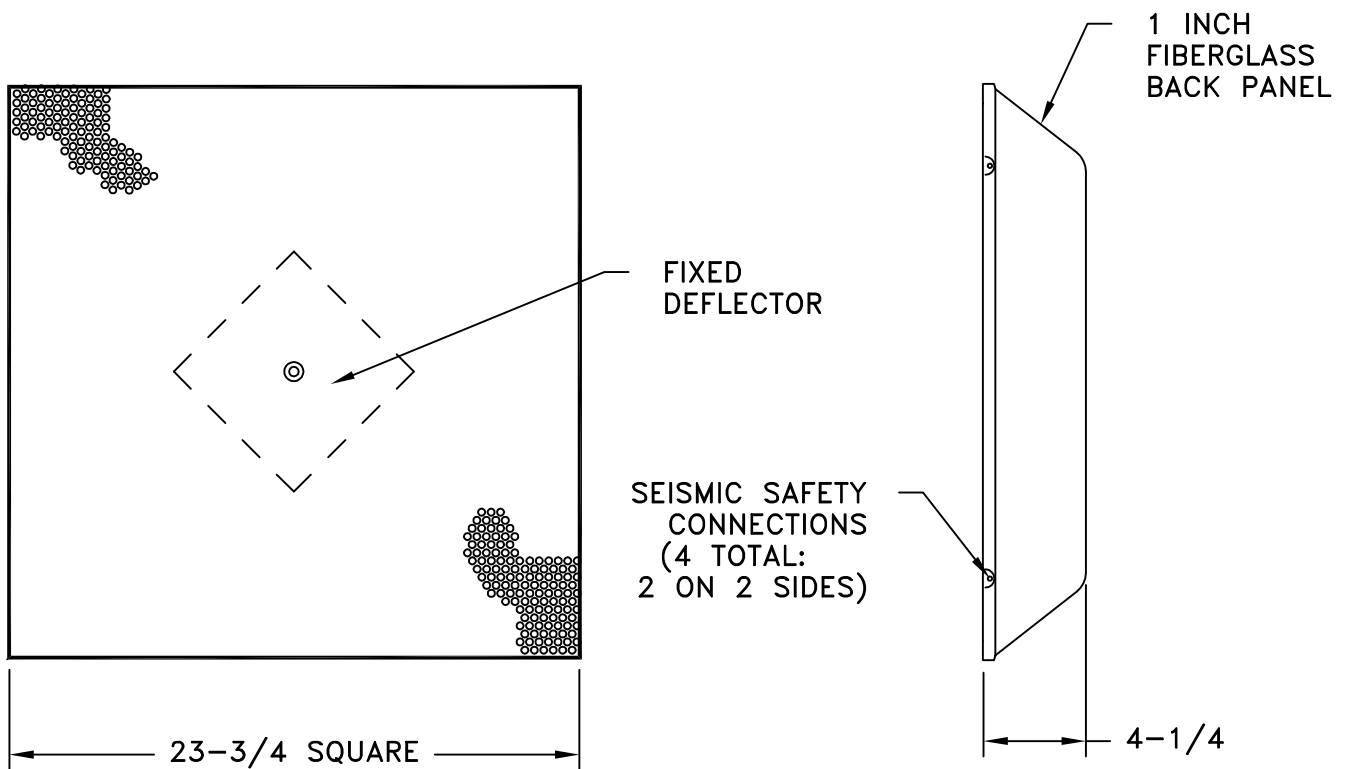

### STEEL FACE DETAIL

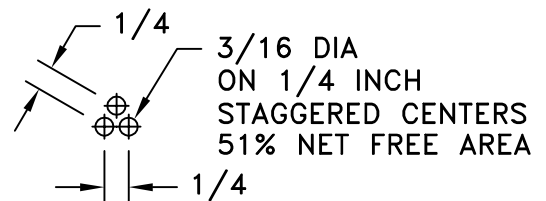

### FEATURES

- 1" fiberglass plenum; R4.2 (R6 Optional)
- Aluminum foil vapor barrier
- Fits standard 24" x 24" lay-in T-Bar
- Standard finish is white
- Fiberglass plenum tested in compliance with surface burning characteristics ASTM E-84 and erosion test UL181
- Approved for use in Los Angeles, RR - 7811
- Prescored back accepts 6 to 14 inch spin or tab collars
- Directional deflector included
- AL4235 R6: aluminum perforated face w/ R6 back


PROJECT: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_

ENGINEER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

LOCATION: \_\_\_\_\_



**J&J REGISTER**  
AIR DISTRIBUTION PRODUCTS