


# MODEL 850

## DELUXE FLOOR REGISTER

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

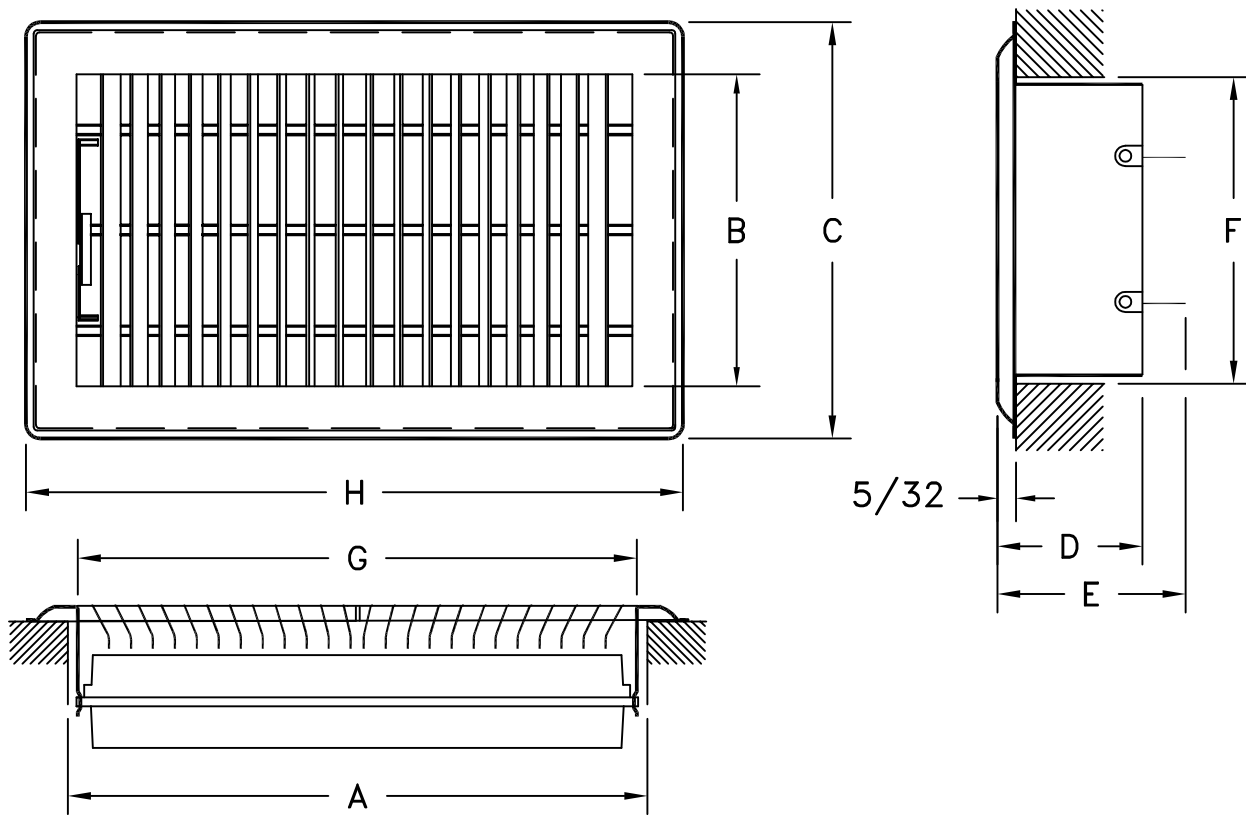

SIZE A X F	FREE AREA SQ.IN.	DIMENSIONS (SEE DETAIL SKETCHES)						
		DAYLIGHT OPENING		OVERALL		DEPTH		
		B	G	C	H	D (CLOSED)	E (OPEN)	
10 X 2	15	2	9-3/4	3-3/8	11-1/8	1-7/8	2-5/8	
12 X 2	19	2	11-3/4	3-3/8	13-1/8	1-7/8	2-5/8	
14 X 2	22	2	13-3/4	3-3/8	15-1/8	1-7/8	2-5/8	
10 X 4	29	3-3/4	9-3/4	5-1/8	11-1/8	1-15/16	2-11/16	
12 X 4	35	3-3/4	11-3/4	5-1/8	13-1/8	1-15/16	2-11/16	
14 X 4	40	3-3/4	13-3/4	5-1/8	15-1/8	1-15/16	2-11/16	
10 X 6	44	5-1/2	9-3/4	7-1/4	11-1/8	2- 1/16	2-15/16	
12 X 6	53	5-1/2	11-3/4	7-1/4	13-1/8	2- 1/16	2-15/16	
14 X 6	60	5-1/2	13-3/4	7-1/4	15-1/8	2- 1/16	2-15/16	

The model 850 is a heavy-duty floor register with individually welded diffusion vanes. Constructed of steel, it features a toe operated multi-louver damper. Steel construction only. Standard finish is brown.

PROJECT: \_\_\_\_\_  
 ARCHITECT: \_\_\_\_\_  
 ENGINEER: \_\_\_\_\_  
 CONTRACTOR: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_

