
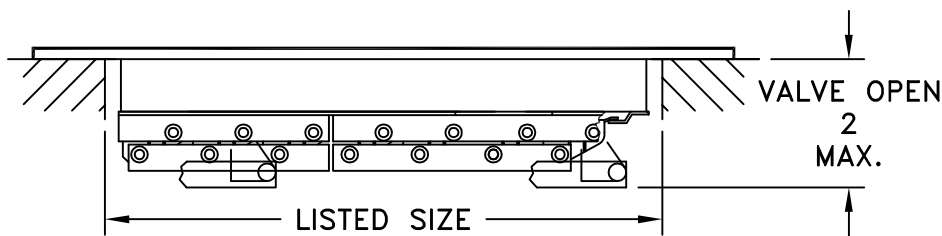


MODEL 900-50/AL900-50

SINGLE DEFLECTION SUPPLY WITH MULTI-LOUVER DAMPER

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

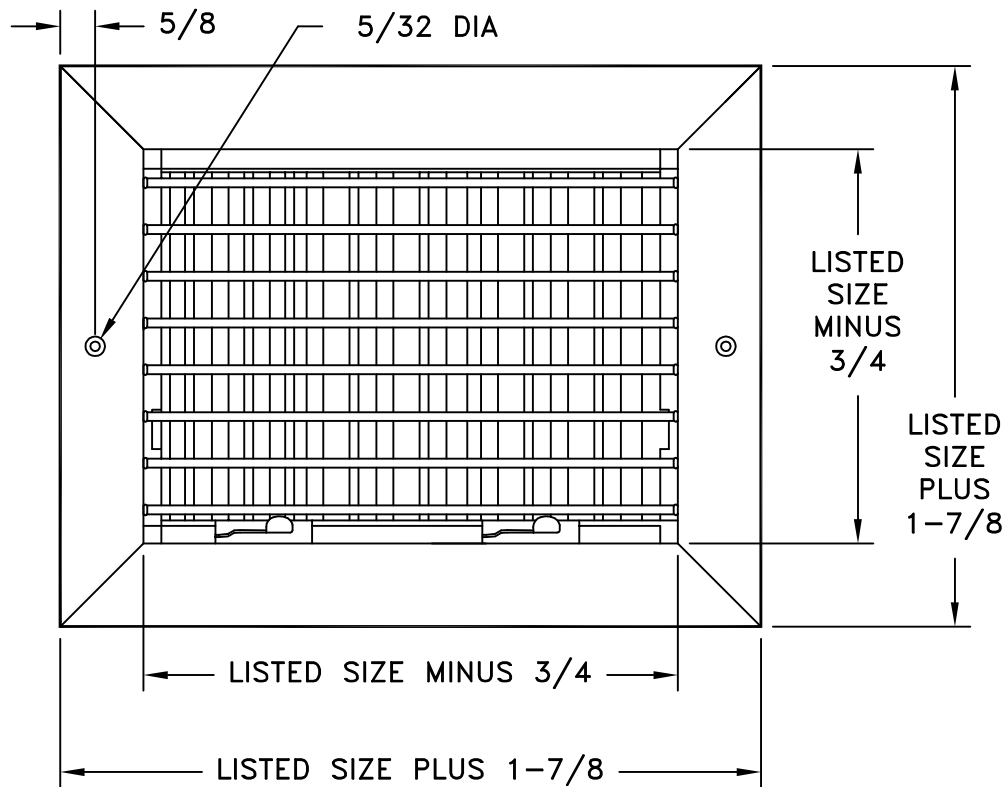

MODELS AVAILABLE

- 900-50H / AL900-50H
- 900-50V / AL900-50V

Model 900-50 has a front row of adjustable blades, which provide air deflection in two directions. Blades are spaced at 3/4" and are spring stiffened at both ends to permit positive setting without special tools. Divided multi-louver damper allows approximately half of the register to be closed while the other half delivers required airflow. Steel or aluminum construction. Standard finish is white.


PROJECT: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

LOCATION: _____



J&J REGISTER
AIR DISTRIBUTION PRODUCTS