



Locking and Unlocking Instructions

Model "E" B-Vent, Pellet Pipe, & Gas Vent Connectors sizes 3" to 6"

TO LOCK NEW CONNECTION STYLE

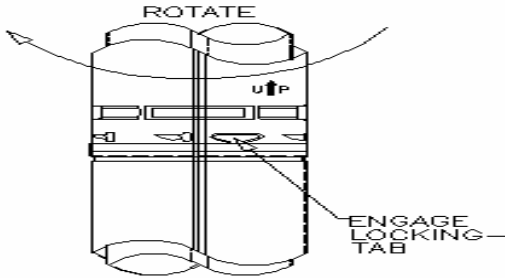


1. Press together and engage the locking tab. Once locking tab is engaged rotate pipe until the "X" on female end of pipe is aligned with the seam of the connecting pipe.




2. Pipes are now firmly connected.

TO UNLOCK NEW CONNECTION STYLE

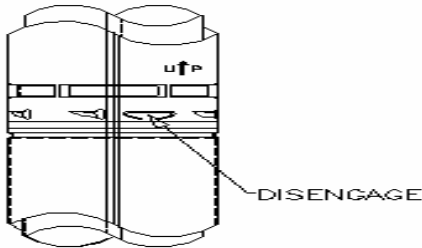


1. Rotate pipe until seams are aligned. Disengage locking tab.

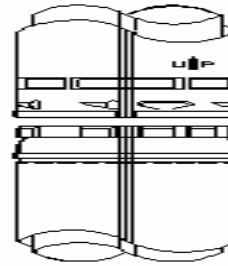


2. Pull pipe sections apart.


NEW/OLD CONNECTION COMPATIBILITY



Line up pipe ends and snap together. Push tab must be engaged for secure connection.

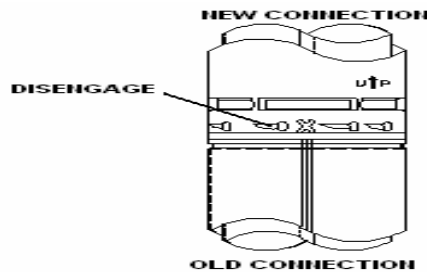

To disconnect new female end from old male end, disengage lance to left of embossed "X" and the push tab.

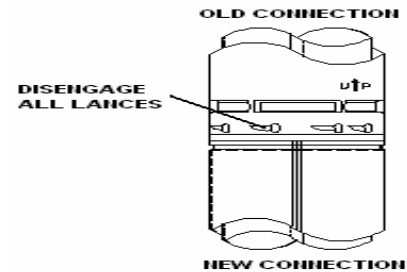

To disconnect new male end from old female end, disengage all lances and the push tab. Line up seams and pull apart.



American Metal Products Group
 8000 Corporate Exchange Blvd. SE
 Grand Rapids, MI 49512
www.americanmetalproducts.com

800-423-4270 toll-free
 616-856-9483 phone
 616-856-3825 toll-free fax
 616-856-6388 fax